

FFC-Display FPDI-1 Cable assemblies

FFC FPDI-1 interface cables designed to interface between LCDs and Controller/Single Board Computers

QD3406 SERIES



CN1 =CN2 = DF9-41S-1V MOLDED TO FFC

FFC Insulation = Polyester film + Polyester Adhesive

Flat Conductor = Tin Plated Copper

Pitch = 0.5; Conductor Width = 0.3; Conductor Thickness = 0.035

Total Pitch = 20mm; Width = 21mm; Margin = +/- 0.15


100% Tested for Electrical Continuity. UL 20624 80C 60V VW1

Meets FPDI-1 standards

Standard lengths & orientation available for immediate delivery

Custom length & orientation/pinout available - Contact Factory

| <u>Part No</u> | <u>Description</u> | <u>Length "L" (mm)</u> | |
|-------------------|----------------------|------------------------|-----------------------|
| QD3406-3MLD | DF9-41S-2-FFC-69 AE | 69 | Stock item |
| QD3406-6MLD | DF9-41S-2-FFC-145 AE | 145 | Stock item |
| QD3406-8MLD | DF9-41S-2-FFC-195 AE | 195 | |
| QD3406-9MLD | DF9-41S-2-FFC-221 AE | 221 | Stock item |
| QD3406-10MLD | DF9-41S-2-FFC-246 AE | 246 | |
| QD3406-12MLD | DF9-41S-2-FFC-297 AE | 297 | Stock item |
| QD3406-LMLD (in.) | DF9-41S-2-FFC-"L" AE | "L" | Specify Custom Length |

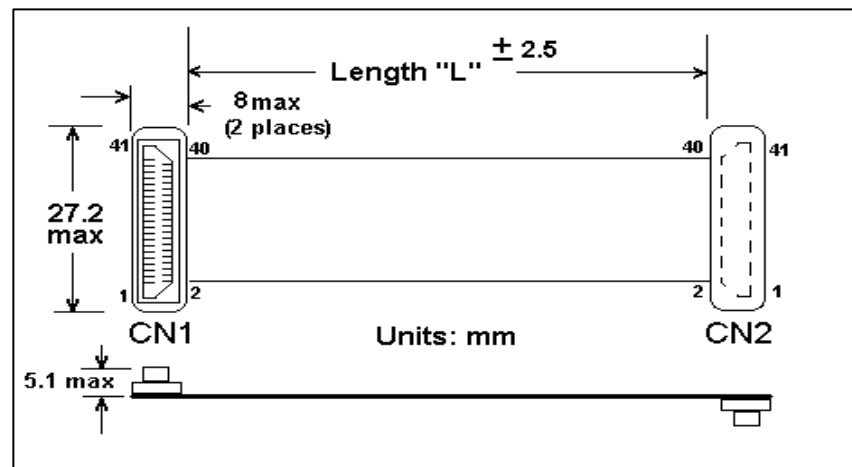

QUADRANGLE PRODUCTS INC

28 HARRISON AVE - BLD 16 SUITE D - ENGLISHTOWN, NJ 07726 - Tel. 732-792-1234 Fax 732-792-8305 www.quadrangleproducts.com