


QD4606 SERIES

<u>CN1</u>	<u>CN2</u>	
1	1	CN1 =CN2 = DF9-31S-1V MOLDED TO FFC
2	2	
3	3	FFC Insulation = Polyester film + Polyester Adhesive
4	4	
5	5	Flat Conductor = Tin Plated Copper
6	6	Pitch = 0.5; Conductor Width = 0.3; Conductor Thickness = 0.035
7	7	Total Pitch = 15; Width = 16; Margin = +/- 0.15
8	8	Units: mm
9	9	
10	10	100% Test for Electrical Continuity.
11	11	
12	12	

<u>Part No</u>	<u>Description</u>	<u>Length "L" (mm)</u>
13	13	
14	14	
15	15	
16	16	
17	17	
18	18	
19	19	
20	20	
21	21	
22	22	
23	23	
24	24	
25	25	
26	26	
27	27	
28	28	
29	29	
30	30	
31	31	

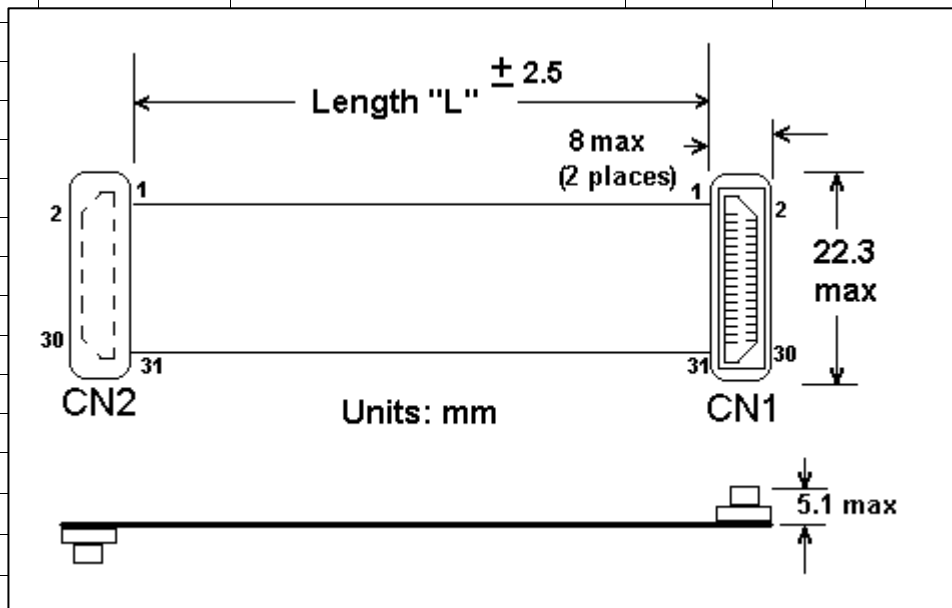

Quadrangle Products, Inc.
 Tele: 732-792-1234
 Fax: 732-792-8305
www.quadrangleproducts.com