



CN1	CN2	CN3
1	2	
2	3	
3	4	
4	5	
5	6	
6	7	
7	8	
8	9	
9	10	
10	11	
11	12	
12	13	
13	14	
14	15	
15	16	
16	17	
17	18	
18	19	
19	20	
20	21	
21	22	
22		1
23		2
24		3
25		4
26		5
27		6
28		7
29		8
30		9
31		10
32		11
33		12
34		13
35		14
36		15
37		16
38		17
39		18
40		19
41		20
42		21
43		22
44		23
45		24
46		25
47		26
48		27
49		28
50		29
51		30

J1 = HIROSE DF9-51S-1V
 J2 = HIROSE DF11-22DP-2DSA(24) OR EQUAL (HEADER FOR HIROSE DF11-22DS-2C)
 J3 = HIROSE DF11-30DP-2DSA(24) OR EQUAL (HEADER FOR HIROSE DF11-30DS-2C)
 THIS ADAPTERBOARD TRANSITIONS FROM HIROSE DF9-51S-1V TO DISCRETE WIRE HEADERS WHICH CAN THEN MATE TO CUSTOM CABLES OR FLYING LEADS

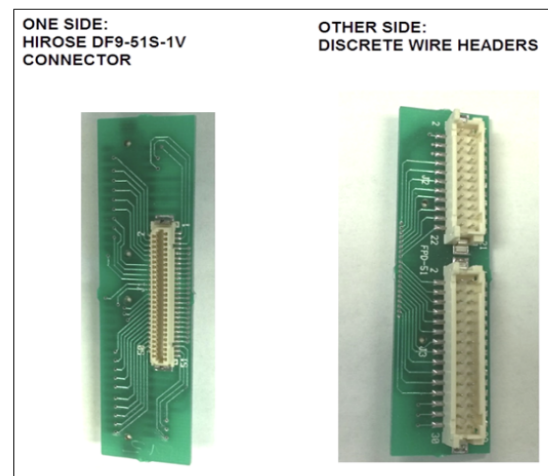

DWG BY: PT	DATE: 8/3/18	DRAWINGS ARE NOT TO SCALE. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED. ALL TOLERANCES ARE +/- 0.50" UNLESS OTHERWISE SPECIFIED
CHK BY: PT	DATE: 8/3/18	
APPR: PT	DATE: 8/3/18	

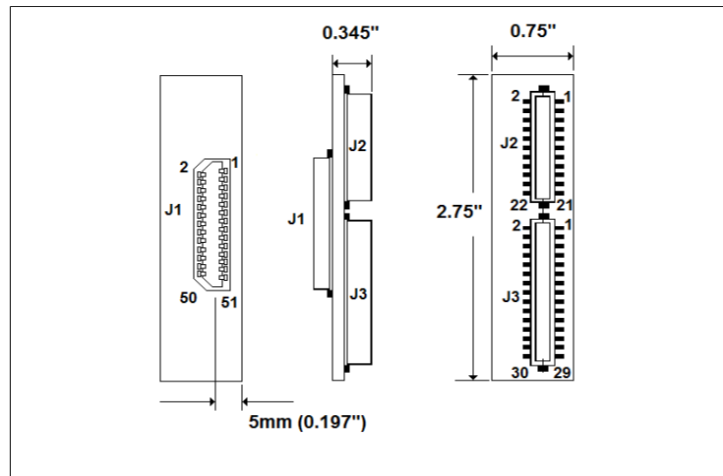

Quadrangle Products Inc.

Quadrangle Products Inc.
 28 Harrison Ave Suite 105
 Englishtown, NJ 07726

Tel: 732-792-1234
 Fax: 732-792-8305

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
---	Updated Spec Sheet Created	8/3/18	PT

© Copyright 2006 Quadrangle Products Inc.
 This document is confidential and proprietary to Quadrangle Products Inc. and shall not be reproduced, copied, used, or issued as the basis of manufacturing and/or sale of equipment, material, or any other item. Quadrangle Products Inc. has the sole and exclusive ownership rights to this document and information contained herein.

QD1680