

CN1 CN2

- 1 1
- 2 2
- 3 3
- 4 4
- 5 5
- 6 6
- 7 7
- 8 8
- 9 9
- 10 10
- 11 11
- 12 12
- 13 13
- 14 14
- 15 15
- 16 16
- 17 17
- 18 18
- 19 19
- 20 20
- 21 21
- 22 22
- 23 23
- 24 24
- 25 25
- 26 26
- 27 27
- 28 28
- 29 29
- 30 30
- 31 31
- 32 32
- 33 33
- 34 34
- 35 35
- 36 36
- 37 37
- 38 38
- 39 39
- 40 40
- 41 41

CN1 = DF9-41S-1V MOLDED TO FFC

CN2 = DF9-41S-1V MOLDED TO FFC

FFC INSULATION = UL20706 (NO MARKING)

FLAT CONDUCTOR = TIN PLATED COPPER


LENGTH "L" = 76mm +/- 2.5mm

100% Test for Electrical Continuity.

RoHS Compliant

FFC DIMENSIONS:

- PITCH = 0.5 mm
- CONDUCTOR WIDTH = 0.30mm
- CONDUCTOR THICKNESS = 0.035mm
- TOTAL PITCH = 20 mm
- MARGIN = +/- 0.15

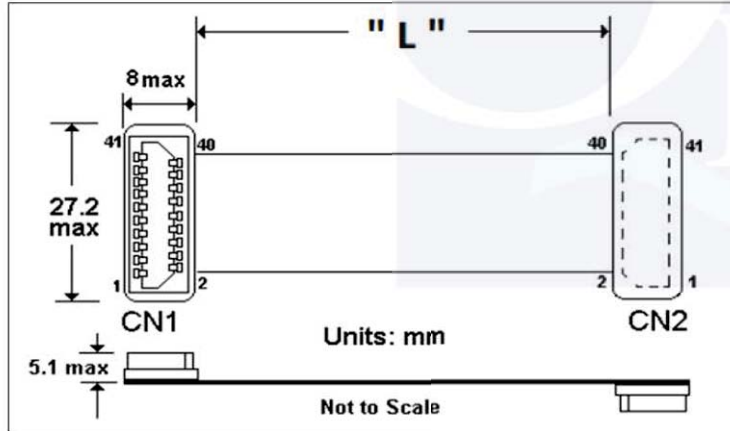

DWG BY: PT	DATE: 7/2/14
CHK BY:	DATE:
APPR: -	DATE: -

DRAWINGS ARE NOT TO SCALE. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED. ALL TOLERANCES ARE +/- 0.50" UNLESS OTHERWISE SPECIFIED

REVISION HISTORY			
REV		DATE	APPROVED
---	Drawing Update	7/2/14	PT



Quadrangle Products Inc.

Quadrangle Products Inc.
28 Harrison Ave Bldg 16, Suite D,
Englishtown, NJ 07726

Tel: 732-792-1234
Fax: 732-792-8305

© Copyright 2006 Quadrangle Products Inc. This document is confidential and proprietary to Quadrangle Products Inc. and shall not be reproduced, copied, used, or issued as the basis of manufacturing and/or sale of equipment, material, or any other item. Quadrangle Products Inc. has the sole and exclusive ownership rights to this document and information contained herein.

QD3406-3MLD