


CN1 = JAE FI-X30H

CN2 = HIR DF13-2630 SCF
CRIMPED WIRES CAN BE INSERTED INTO ANY HIROSE DF13 CONNECTOR

WIRE = UL1571 AWG 28(7)

TP = 4-5 TWISTS PER INCH

LENGTH = "L" = 18.00" +/- 0.25"

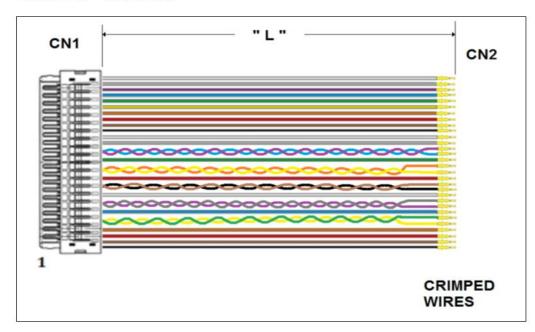



DWG BY: VB	DATE: 9/14/16	DRAWINGS ARE NOT TO SCALE. ALL DIMENSIONS ARE IN		
CHK BY: VB	DATE: 9/14/16	INCHES UNLESS OTHERWISE SPECIFIED. ALL TOLERANCES ARE +/- 0.50" UNLESS OTHERWISE		
APPR: VB	DATE: 9/14/16	SPECIFIED		
DEVISION LUSTORY				

REVISION HISTORY			
REV		DATE	APPROVED
	Initial Release	9/14/16	VB
	Drawing Update	9/14/17	PT



Quadrangle Products Inc.

Quadrangle Products Inc. 28 Harrison Ave Suite 105, Englishtown, NJ 07726

Tel: 732-792-1234 Fax: 732-792-8305

© Copyright 2006 Quadrangle Products Inc.
This document is confidential and proprietary to Quadrangle Products
Inc. and shall not be reproduced, copied, used, or issued as the basis of
manufacturing and/or sale of equipment, material, or any other item.
Quadrangle Products Inc. has the sole and exclusive ownership rights
to this document and information contained herein.

QD3657-KIT01 (800-00127)