

**CN1 CN2**

- 1 1
- 2 2
- 3 3
- 4 4
- 5 5
- 6 6
- 7 7
- 8 8
- 9 9
- 10 10
- 11 11
- 12 12
- 13 13
- 14 14
- 15 15
- 16 16
- 17 17
- 18 18
- 19 19
- 20 20
- 21 21
- 22 22
- 23 23
- 24 24
- 25 25
- 26 26
- 27 27
- 28 28
- 29 29
- 30 30

**CN1 = IPEX 20453-030T-01 WITH PULL BAR**


**CN2 = IPEX 20453-030T-01 WITH PULL BAR**

**Wire = Small Gauge Coaxial Laminate AWG 40 UL1354**

**Length = "L" = 153mm +/- 5mm**

**Notes:**

- 1- Shields of each coax to be terminated to CN1 & 2 connector shells.**
- 2- Strain relieve wire and connectors**

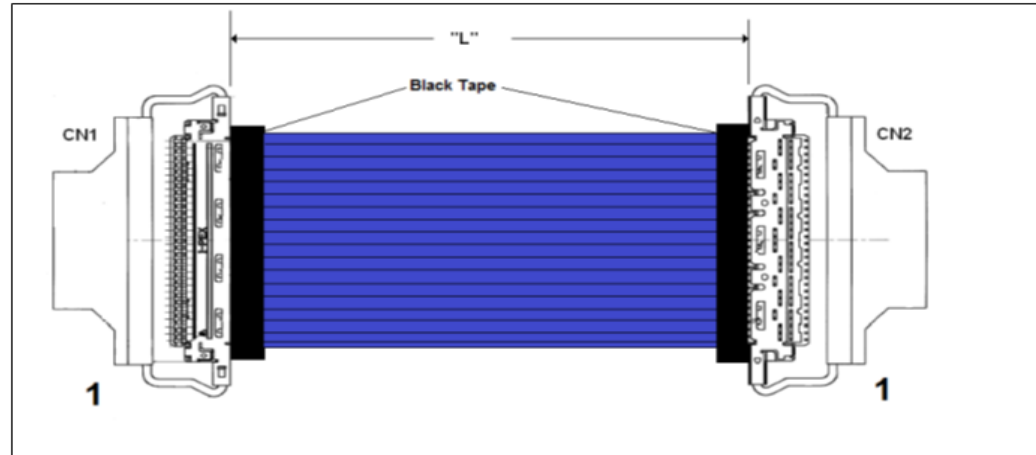

DWG BY: VB	DATE: 10/15/15	DRAWINGS ARE NOT TO SCALE. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED. ALL TOLERANCES ARE +/- 0.50" UNLESS OTHERWISE SPECIFIED
CHK BY:	DATE:	
APPR: -	DATE: -	

REVISION HISTORY			
REV		DATE	APPROVED
---	Initial Release	10/15/15	VB/PT



Quadrangle Products Inc.  
28 Harrison Ave Suite 105, Englishtown, NJ 07726  
Tel: 732-792-1234  
Fax: 732-792-8305

© Copyright 2006 Quadrangle Products Inc.  
This document is confidential and proprietary to Quadrangle Products Inc. and shall not be reproduced, copied, used, or issued as the basis of manufacturing and/or sale of equipment, material, or any other item. Quadrangle Products Inc. has the sole and exclusive ownership rights to this document and information contained herein.

**SGC1102-6**