


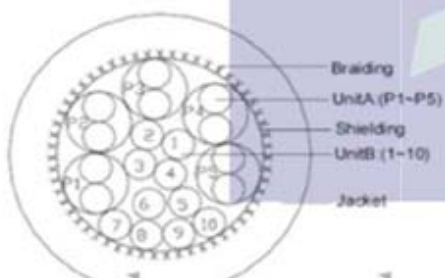

# Quadrangle Products Inc.

# UL20276 5P+10C Shielded and Jacketed

SPECIFICATION		UL20276 30AWG/5P+30AWG/10C+AL/MY+DW+BRAID+JACKET		COLOR CODE
ITEM		SPECIFICATION		
CONDUCTOR	AWG	30AWG/5P	30AWG/10C	<b>30 AWG/5P:</b> 1. BLACK - BLACK/WHITE 2. BROWN - BROWN/WHITE 3. RED - RED/WHITE 4. ORANGE - ORANGE/WHITE 5. YELLOW - YELLOW/WHITE  <b>30AWG/10C</b> 1. BLACK 2. BROWN 3. RED 4. ORANGE 5. YELLOW 6. GREEN 7. BLUE 8. PURPLE 9. GRAY 10. WHITE
	MATERIAL	TINNED COPPER	TINNED COPPER	
	COND.SIZE	7/0.10mm	7/0.10mm	
<b>CROSS SECTION</b> 				
<b>OUTER DIAMETER</b>		5.10±0.20mm		
<b>ELECTRICAL CHARACTERISTICS</b>		 Quadrangle Products Inc.		
1. Rating TEMP: 80°C; Rating voltage: 30volts 2. Conductor Resistance: AT 20°C MAX 30AWG: 376.96Ω/KM				
				<b>MARKING</b>
				MANUFACTURER#  AWM 20276 80°C 30V VW-1 (VARIOUS)