

CN1	CN2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40

CN1 = IPEX 20453-040T-01 WITH PULL BAR

CN2 = IPEX 20453-040T-01 WITH PULL BAR


Wire = Small Gauge Coaxial Laminate AWG 40 UL1354

Length = "L" = 610mm +/- 5mm



**Notes:**

- 1- Shields of each coax to be terminated to CN1 & 2 connector shells.
- 2- Strain relieve wire and connectors

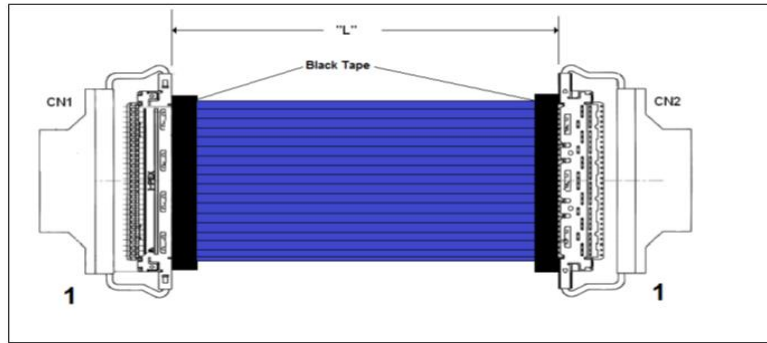

DWG BY: VB	DATE: 1/19/14	DRAWINGS ARE NOT TO SCALE. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED. ALL TOLERANCES ARE +/- 0.50" UNLESS OTHERWISE SPECIFIED
CHK BY:	DATE:	
APPR: -	DATE: -	

REVISION HISTORY			
REV		DATE	APPROVED
---	Initial Release	1/19/14	VB
---	24" Version	9/24/20	VB



Quadrangle Products Inc.

Quadrangle Products Inc.  
28 Harrison Ave Suite 105, Englishtown,  
NJ 07726

Tel: 732-792-1234  
Fax: 732-792-8305

© Copyright 2006 Quadrangle Products Inc.  
This document is confidential and proprietary to Quadrangle Products Inc. and shall not be reproduced, copied, used, or issued as the basis of manufacturing and/or sale of equipment, material, or any other item. Quadrangle Products Inc. has the sole and exclusive ownership rights to this document and information contained herein.

**SGC1095-24**