1 2 3 4 5 6 7 8 9 10 11	} TP } TP
<u>8</u> <u>9</u> 10	}
<u>8</u> <u>9</u> 10	} TP
<u>8</u> <u>9</u> 10	} **TP
8 9 10 11	} TP
9 10 11	S
10 11	
11	
	੍ਰ TP
11 12 13	ſ
13	
14	ે TP
15	ſ
16	
17	੍ਰੇ TP
18	ſ
19	
20	
21	
22	
23	
24	
25	
26	
27	
28	
29	
	15 16 17 18 19 20 21 22 23 24 25 26 27 28


CN1 = JAE FI-X30H

CN2 = JAE FI-XC3B-1-15000
CRIMPED WIRES CAN BE INSERTED INTO JAE FI-X SERIES CONNECTORS

WIRE = UL1571 AWG 28(7)

TP = 4-5 TWISTS PER INCH

LENGTH = "L" = 18.00" +/- 0.25"

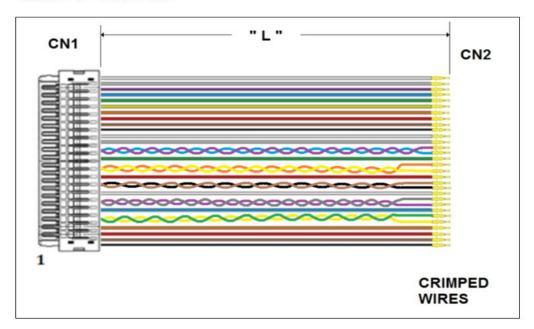



DWG BY: PT	DATE: 7/6/22	DRAWINGS ARE NOT TO SCALE. ALL DIMENSIONS ARE IN
СНК ВҮ:	DATE:	INCHES UNLESS OTHERWISE SPECIFIED. ALL TOLERANCES ARE +/- 0.50" UNLESS OTHERWISE
APPR: -	DATE: -	SPECIFIED

REVISION HISTORY				
REV		DATE	APPROVED	
	Initial Release	7/6/22	PT	



Quadrangle Products Inc.

Quadrangle Products Inc. 28 Harrison Ave Suite 105, Englishtown, NJ 07726 Tel: 732-792-1234 Fax: 732-792-8305

© Copyright 2006 Quadrangle Products Inc.
This document is confidential and proprietary to Quadrangle Products
Inc. and shall not be reproduced, copied, used, or issued as the basis of
manufacturing and/or sale of equipment, material, or any other item.
Quadrangle Products Inc. has the sole and exclusive ownership rights
to this document and information contained herein.

QD3657-KIT03