



UL20276 10P 28 AWG

SHIELDED & JACKETED TWISTED PAIR CABLE

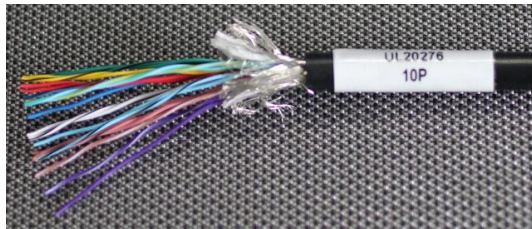

- For Use with LVDS Display Applications
- Overall Braided Shielding
- 10 Twisted Pair Wires
- RoHS Compliant

Cable Construction

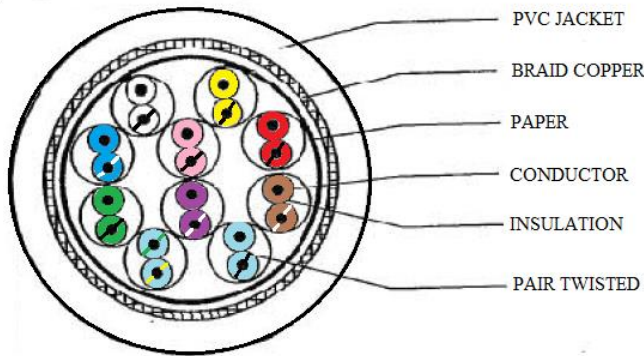

WIRE COLOR CODE

10 Twisted Pairs

- Yellow & Yellow/Black
- Red & Red/Black
- Brown & Brown/White
- Light Blue & Light Blue/Black
- Light Blue/Green & Light Blue/Yellow
- Green & Green/Black
- Blue & Blue/White
- White & White/Black
- Pink & Pink/Black
- Purple & Purple/White

		TWISTED PAIR WIRE
Conductor	AWG	28 AWG
	Material	Tinned Copper
	Size	7/0.127+/-0.008mm
Insulation	MIN.AVG.THICK	0.10mm
	Material	SR-PVC
	O.D.	0.60 +/- 0.05mm
Paper	Coverage	100%
	Overlap	25% MIN
Drain	AWG	/
	Material	/
	Size	/
Braid	Material	Tinned Copper
	Size	16*7/0.12 +/- 0.008mm
Overall Jacket	MIN.AVG.THICK	0.51mm
	Material	HALF MATT PVC
	Color	UL813 BLACK
	O.D.	6.00 +/-0.15 mm

Electrical Characteristics

Temp Rating: 80°C

Voltage Rating 30V

Conductor Resistance at 20°C MAX
28 AWG 237.25Ω/km

Impedance: Pairs 100Ω+/-5Ω

Quadrangle Products Inc
28 Harrison Ave Suite 105
Englishtown, NJ 07726

732-792-1234

www.quadrangleproducts.com