

CN1	P1(J1)	WIRE COLOR	
1	2	Brown	
2	1	Black	
3	4	Orange	
4	3	Red	
5	6	Green	
6	5	Yellow	
7	8	Violet	
8	7	Blue	
9	10	White	
10	9	Gray	
11	12	Brown	
12	11	Black	
13	14	Orange	
14	13	Red	
15	16	Green	
16	15	Yellow	
17	18	Violet	
18	17	Blue	



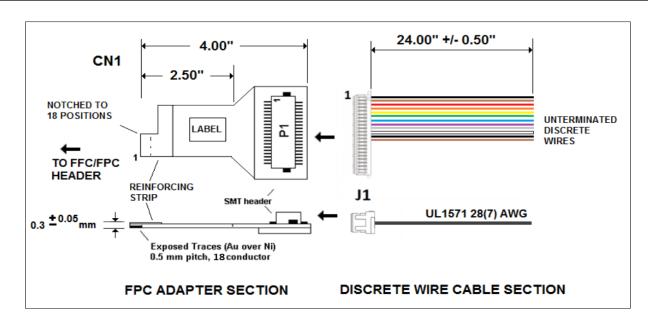

CONVERTS FROM 0.50MM PITCH FFC/FPC INTERFACE TO DISCRETE WIRE SEE NEXT PAGE FOR PICTURES AND ADDITIONAL INFORMATION



DWG BY: PT CHK BY:		TE: 9/2/15	DRAWINGS ARE NOT TO SCALE. ALL DIMENSIONS AF			
		ΓE:	INCHES UNLESS OTHERWISE SPECIFIED. A TOLERANCES ARE +/- 0.50" UNLESS OTHERW			
APPR: -	DAT	ΓE: -	SPECIFIED			
REVISION HISTORY						
REV				DATE	APPROVED	
	INITIAL RELEASE			6/27/06	GLR	
	DRAWING UPDATE, LENGTH INCREASE		9/2/15	PT		



Quadrangle Products Inc.

Quadrangle Products Inc. 28 Harrison Ave Suite 105, Englishtown, NJ 07726 Tel: 732-792-1234 Fax: 732-792-8305

© Copyright 2006 Quadrangle Products Inc.
This document is confidential and proprietary to Quadrangle Products
Inc. and shall not be reproduced, copied, used, or issued as the basis of
manufacturing and/or sale of equipment, material, or any other item.
Quadrangle Products Inc. has the sole and exclusive ownership rights
to this document and information contained herein.

RT-700G-18-DIS CABLE KIT

FPC Adapter Part Number:

QD5747AD (33 Conductor Base) (2-33 Conductors When Customized)

FPC Adapter Part Number:

QD5745AD (50 Conductor Base) (2-50 Conductors When Customized)



** Example shown using QD5747AD **



Discrete Wire Flying Lead Part Number (40C): QD6021 (Used with QD5747AD) Discrete Wire Flying Lead Part Number (50C): QD6023 (Used with QD5745AD)