


**TOLERANCE:**

Abbr.	TOLERANCE				
	P=0.5	P=0.8	P=1.0	P=1.25	P=2.54
P	±0.05	±0.08	±0.08	±0.10	±0.20
Pt	±0.08	±0.10	±0.10	±0.15	±0.2
W	±0.12	±0.15	±0.15	±0.20	±0.2
M	±0.08	±0.12	±0.12	±0.20	±0.30
Cw	±0.02	±0.03	±0.03	±0.03	±0.04
L	(30~100)±3, (101~300)±5, (301~600)±10, (Length more than 601mm)±15mm				

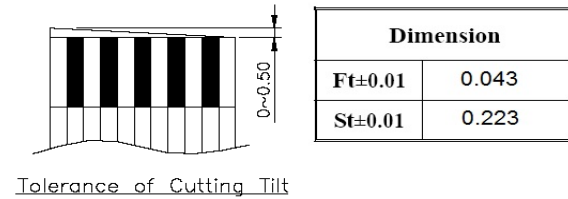

Dimension	
Ft±0.01	0.043
St±0.01	0.223

Quadrangle P/N (Description)	No. of Conductor	Dimension										Support Tape Color	
		P	Pt	L	W	M	Cw	Ct±0.01	S1±1.0	S2±1.0	d1±2.0		d2±2.0
<b>QDP0.50-20C1016BD-G</b>	20	0.5	9.5	1016	10.5	0.5	0.3	0.035	4	4	8	8	BLUE

**UL Style**

UL 20706 60 Volt; 105°C VW-1 RoHS Compliant

**Marking**

No

Replaced QD6000-20C-40FFC

**Conductor Material**

GOLD

**Units**

mm



DWG BY: MHB	DATE: 09/18/09	DRAWINGS ARE NOT TO SCALE. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED. ALL TOLERANCES ARE +/- 0.50" UNLESS OTHERWISE SPECIFIED
CHK BY:	DATE:	
APPR:	DATE:	

**REVISION HISTORY**

REV	DATE	APPROVED
-----	INITIAL RELEASE	9/18/2009 MHB
-----		
-----		
-----		



Quadrangle Products Inc. 28 Harrison Ave Suite 105 Englishtown, NJ 07726	Tel: 732-792-1234 Fax: 732-792-8305
--	--

© Copyright 2006 Quadrangle Products Inc. This document is confidential and proprietary to Quadrangle Products Inc. and shall not be reproduced, copied, used, or issued as the basis of manufacture or sale of equipment, material, or any other item. Quadrangle Products Inc. has the sole and exclusive ownership rights to this document and information contained herein.

**QDP0.50-20C1016BD-G**